

Model No. 6-Pole cage motor TCA 200L 22kW D400V 50Hz IM3001-FF350

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	22	30	43	985	213,3	IE3	92,2	0,80	6,11	2,10	2,50
690	Y				24,9								
460	D	60	26	34,85	42,9	1184	209,7	IE2	93,0 93,0 92,6	0,82	6,17	2,02	2,38
					24,7								

Motor type	TCA200LB6E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	22 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	53 K
Temperature rise surface	-
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6212/C3
Lubrication method	20gr/13700hrs
Type of grease	Chevron SRI-2

Country of origin	CN
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	210%	609%		250%	18,9 A
@ D 460V 60Hz	202%	615%		238%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30


This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3001-FF350
Cooling method	IC411
Motor weight - approx.	240 kg
Gross weight - approx.	247 kg
Motor inertia	0,6400 kgm²
Vibration level	according IEC60034-14

Direction of rotation	cw / ccw
-----------------------	-----------------

PTC 150°C

Schematic presentation of torque-speed curve

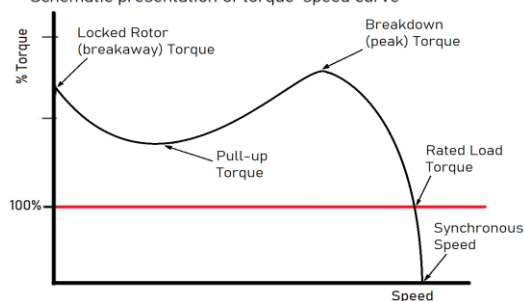

P000019648

P000019649



Driving efficiency and sustainability

