

Model No. 6-Pole cage motor TCA 200L 30kW D400V 50Hz IM3001-FF350

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	30	40	58,9	985	290,9	IE3	92,9	0,79	6,21	2,22	2,59
690	Y				34								

Motor type	TCA200LC6E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	30 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6212/C3
Lubrication method	20gr/13700hrs
Type of grease	Chevron SRI-2

Phase resistance at 20°C	0,1995 Ohm
Country of origin	CN

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	222%	619%		259%	24 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.


Degree of protection	IP55
Mounting type	IM3001-FF350
Cooling method	IC411
Motor weight - approx.	300 kg
Gross weight - approx.	310 kg

Vibration level **according IEC60034-14**

Direction of rotation **cw /ccw**

PTC 150°C

Schematic presentation of torque-speed curve

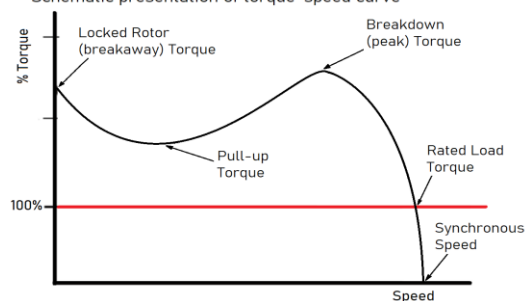

P000019652



Driving efficiency and sustainability

