

Model No. 6-Pole cage motor TCA 225M 37kW D400V 50Hz IM3001-FF400

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	37	49,6	68,7	985	358,7	IE3	93,3	0,83	6,90	2,23	2,87
690	Y				39,6								
460	D	60	42,5	56,97	55,5	1187	341,9	IE2	93,0	0,83	8,32	2,20	2,80

Motor type	TCA225MB6E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	225M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	37 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-

Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6213/C3
Lubrication method	22gr/13400hrs
Type of grease	Chevron SRI-2

Country of origin	CN
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	223%	689%		287%	29,1 A
@ D 460V 60Hz	220%	830%		280%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.


Degree of protection	IP55
Mounting type	IM3001-FF400
Cooling method	IC411
Motor weight - approx.	400 kg
Gross weight - approx.	410 kg

Vibration level	according IEC60034-14
-----------------	------------------------------

Direction of rotation	cw /ccw
-----------------------	----------------

	PTC 150°C
--	------------------

Schematic presentation of torque-speed curve

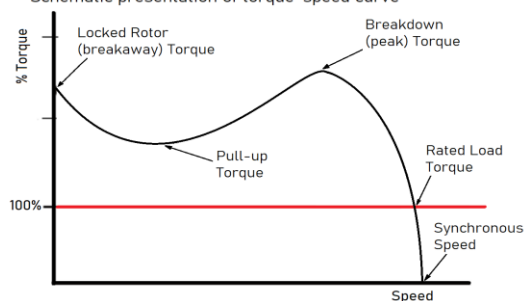

P000019663
P000056938



Driving efficiency and sustainability

