

Model No. 2-Pole cage motor TCA 280S 75kW D400V 50Hz IM2001-FF500

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	75	100	126	2982	240,2	IE3	94,9	0,90	7,95	1,75	3,15
690	Y				73,3								
460	D	60	86	115,3	128	3582	229,3	IE3	95,0	0,89	7,90	2,07	3,67
					71								

Motor type	TCA280S2E3
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	280S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	75 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	57 K
Temperature rise surface	32 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6314/C3
Lubrication method	23gr/4300hrs
Type of grease	Chevron SRI-2

Country of origin	CN
-------------------	-----------

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	175%	793%		315%	40,8 A
@ D 460V 60Hz	207%	789%		367%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30


This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2001-FF500
Cooling method	IC411
Motor weight - approx.	570 kg
Gross weight - approx.	590 kg
Motor inertia	1,0900 kgm²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	0 dB(A)

Direction of rotation	cw / ccw
-----------------------	-----------------

PTC 150°C

Schematic presentation of torque-speed curve

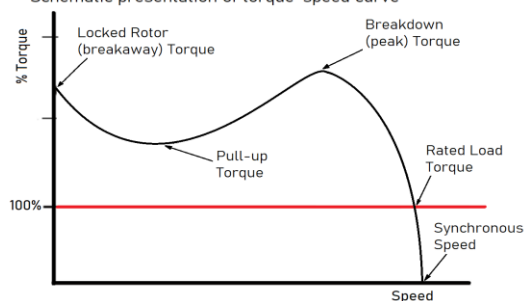

P000019693

P000019694



Driving efficiency and sustainability

