

**Model No.** 8-Pole cage motor TCA 355M 110kW D400V 50Hz IM3011-FF740

| U<br>(V) | Δ / Y<br>Conn | f<br>[Hz] | P<br>[kW] | P<br>[hp] | I<br>[A] | n<br>[RPM] | T<br>[Nm] | IE<br>Class | % EFF at __ load<br>FL 3/4FL 1/2FL | PF at __ load<br>FL 3/4FL 1/2FL | I <sub>A</sub> /I <sub>N</sub><br>[pu] | T <sub>A</sub> /T <sub>N</sub><br>[pu] | T <sub>K</sub> /T <sub>N</sub><br>[pu] |
|----------|---------------|-----------|-----------|-----------|----------|------------|-----------|-------------|------------------------------------|---------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| 400      | D             | 50        | 110       | 150       | 205      | 743        | 1413,9    | IE3         | 93,7                               | 0,82                            | 6,06                                   | 1,41                                   | 2,38                                   |
| 690      | Y             |           |           |           | 118      |            |           |             |                                    |                                 |                                        |                                        |                                        |
| 460      | D             | 60        | 127       | 170,2     | 202      | 892        | 1359,7    | IE3         | 94,1                               | 0,84                            | 6,03                                   | 1,36                                   | 2,29                                   |
|          |               |           |           |           | 116      |            |           |             |                                    |                                 |                                        |                                        |                                        |

|                |                                     |
|----------------|-------------------------------------|
| Motor type     | <b>TCA355MA8E3</b>                  |
| Enclosure      | <b>Totally Enclosed Fan Cooling</b> |
| Frame Material | <b>Cast iron</b>                    |
| Frame size     | <b>355M</b>                         |
| Duty           | <b>S1</b>                           |
| Voltage        | <b>400 V</b>                        |
| Frequency      | <b>50 Hz</b>                        |
| Power output   | <b>110 kW</b>                       |

|                     |                       |
|---------------------|-----------------------|
| Insulation class    | <b>F</b>              |
| Ambient temperature | <b>-20 till 40 °C</b> |
| Temperature rise    | <b>-</b>              |

|                               |                  |
|-------------------------------|------------------|
| Temperature rise surface      |                  |
| Altitude above sea level      | <b>1000 mtr</b>  |
| Hazardous area classification | <b>Safe area</b> |

|                    |                      |
|--------------------|----------------------|
| Rotor type         | <b>Cage motor</b>    |
| Bearing type       | <b>6322/C3</b>       |
| Lubrication method | <b>60gr/6950hrs</b>  |
| Type of grease     | <b>Chevron SRI-2</b> |

|                   |           |
|-------------------|-----------|
| Country of origin | <b>CN</b> |
|-------------------|-----------|

| Voltage/Freq  | Locked rotor<br>Torque [%<br>nom] | Starting<br>current [% nom] | Pull-up<br>Torque [% nom] | Breakdown<br>Torque [% nom] | No-load<br>Current [A] |
|---------------|-----------------------------------|-----------------------------|---------------------------|-----------------------------|------------------------|
| @ D 400V 50Hz | 141%                              | 604%                        |                           | 238%                        | 81,3 A                 |
| @ D 460V 60Hz | 136%                              | 599%                        |                           | 229%                        |                        |

#### NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

|            |                  |               |
|------------|------------------|---------------|
| Efficiency | Europe           | Global IEC    |
| Standards  | EN-IEC: 60034-30 | IEC: 60034-30 |

This is an uncontrolled copy, data can be changed anytime.


|                        |                     |
|------------------------|---------------------|
| Degree of protection   | <b>IP55</b>         |
| Mounting type          | <b>IM3011-FF740</b> |
| Cooling method         | <b>IC411</b>        |
| Motor weight - approx. | <b>1420 kg</b>      |
| Gross weight - approx. | <b>1460 kg</b>      |
| Motor inertia          | <b>1,3600 kgm²</b>  |

|                 |                              |
|-----------------|------------------------------|
| Vibration level | <b>according IEC60034-14</b> |
|-----------------|------------------------------|

|                       |                |
|-----------------------|----------------|
| Direction of rotation | <b>cw /ccw</b> |
|-----------------------|----------------|

|  |                  |
|--|------------------|
|  | <b>PTC 150°C</b> |
|--|------------------|

Schematic presentation of torque-speed curve

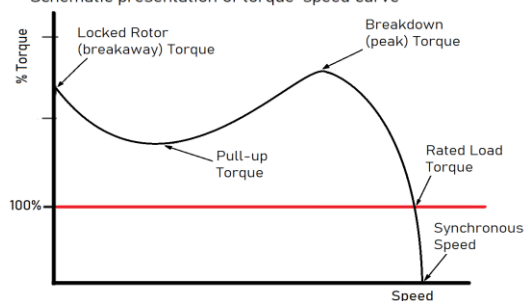

P000019755

P000019756



Driving efficiency and sustainability

