

Model No. 2-Pole cage motor 5RN 315S 110kW D400V 50Hz IM2021-FF600

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	110	150	190	2982	352,3	IE2	94,3 93,7 92,3	0,88 0,85 0,78	7,84	2,28	3,12
690	Y				110								
460	D	60	123	164,9	184	3582	327,9	N/A	93,8 93,0 90,7	0,88 0,87 0,79	7,92	2,50	3,10

Motor type	5RN315S02B0
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	315S
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	110 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	70 K
Temperature rise surface	29 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6316/C3
Lubrication method	30gr/3000hrs
Type of grease	Unirex N3

Phase resistance at 20°C	0,0368 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	228%	778%	192%	312%	60,3 A
@ D 460V 60Hz	250%	788%	195%	310%	53,3 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2021-FF600
Cooling method	IC411
Motor weight - approx.	700 kg
Gross weight - approx.	720 kg
Motor inertia	1,2000 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	0 dB(A)

Direction of rotation	cw /ccw
	PTC 150°C

Schematic presentation of torque-speed curve

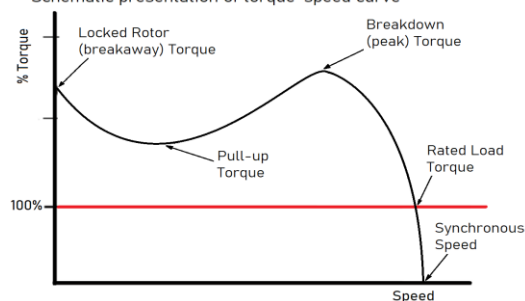

P000001140
P000001144



Driving efficiency and sustainability

