

Model No. 4-Pole cage motor 6RN 100L 3kW D400V 50Hz IM2081-FF215

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	3	4	6,1	1425	20,1	IE1	81,1	82,5	81,8	0,84	0,77	0,64	5,60	2,39	2,61
690	Y				3,52												
460	D	60	3,45	4,625	6	1725	19,1	IE1	83,3	84,5	83,9	0,84	0,78	0,67	6,26	2,49	2,62

Motor type	6RN100L04E15
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	100L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	3 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. F
Temperature rise winding	81 K
Temperature rise surface	37 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Te time	0 sec

Rotor type	Cage motor
Bearing type	6306-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	6,4396 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	239%	586%	160%	261%	3,3 A
@ D 460V 60Hz	249%	645%	161%	262%	2,84 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2081-FF215
Cooling method	IC411
Motor weight - approx.	35 kg
Gross weight - approx.	36 kg
Motor inertia	0,0078 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	60 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

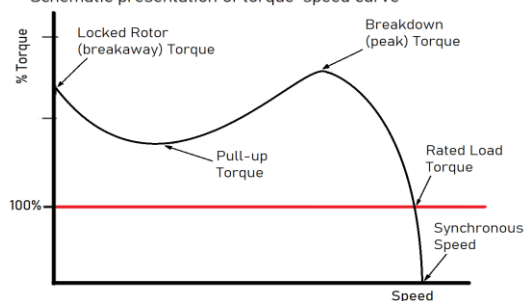

P000040482
P000040501



Driving efficiency and sustainability

