

Model No. 2-Pole cage motor 6RN 160M 15kW D230V 50Hz IM1081

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
230	D	50	15	20	46,8	2960	48,4	IE3	91,9 91,9 90,9	0,87	9,38	2,73	4,28
400	Y				27								
265	D	60	17,3	23,19	47	3560	46,4	IE3	91,9 91,4	0,88	9,63	2,76	4,20
460	Y				27,1								

Motor type	6RN160M02E33
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	160M
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	15 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B
Temperature rise winding	62 K
Temperature rise surface	28 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6309-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Phase resistance at 20°C	0,1350 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	273%	935%	243%	428%	18,4 A
@ D 265V 60Hz	276%	961%	237%	420%	16,4 A

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM1081
Cooling method	IC411
Motor weight - approx.	110 kg
Gross weight - approx.	113 kg
Motor inertia	0,0610 kgm ²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	77 dB(A)

Direction of rotation	cw / ccw
-----------------------	----------

Schematic presentation of torque-speed curve

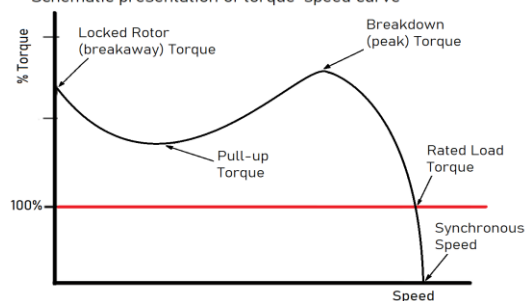

P000043018
P000048826



Driving efficiency and sustainability

