

Model No. 8-Pole cage motor 6RN 200L 18,5kW D400V 50Hz IM3021-FF350

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	18,5	24,8	39	720	245,4	IE2	88,6	0,78	5,83	2,56	2,97
690	Y				6,25								
460	D	60	22	30	38,5	868	242,1	N/A	90,2	0,80	5,90	2,40	2,90

Motor type	6RN200L08E26
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	18,5 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise winding	69 K
Temperature rise surface	49 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6312-2Z/C3WT

Type of grease	Unirex N3
----------------	-----------

Country of origin	CZ
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	256%	582%		297%	18,1 A
@ D 460V 60Hz	240%	589%		290%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1


Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM3021-FF350
Cooling method	IC411
Motor weight - approx.	230 kg
Gross weight - approx.	237 kg
Motor inertia	0,4160 kgm ²
Vibration level	according IEC60034-14
Direction of rotation	cw / ccw

Schematic presentation of torque-speed curve

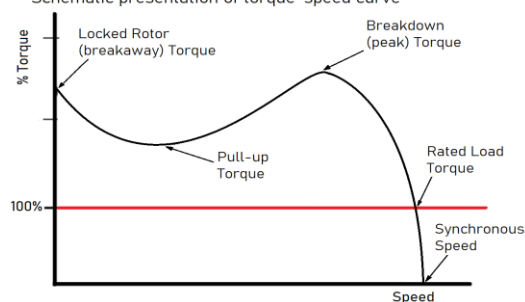

P000015330
P000049212



Driving efficiency and sustainability

