

Model No. 6-Pole cage motor QCA 200L 18,5kW D400V 50Hz IM2001-FF350

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __ load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
									FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	18,5	24,8	36,3	986	179,2	IE4	93,4	93,4	92,3	0,79	0,73	0,61	6,50	2,30	2,80
690	Y				21												
460	D	60	21,3	28,55	36,1	1186	171,5	IE4	93,0	93,0	92,6	0,80			6,60	2,30	2,70

Motor type	QCA200LA6E4
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	200L
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	18,5 kW

Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	-
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6212/C3
Lubrication method	20gr/13700hrs
Type of grease	Chevron SRI-2

Country of origin	CN
-------------------	----

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	230%	650%		280%	
@ D 460V 60Hz	230%	659%		270%	

NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

This is an uncontrolled copy, data can be changed anytime.

Degree of protection	IP55
Mounting type	IM2001-FF350
Cooling method	IC411
Motor weight - approx.	290 kg
Gross weight - approx.	300 kg
Motor inertia	0,6664 kgm ²
Vibration level	according IEC60034-14

Direction of rotation	cw /ccw
	PTC 150°C

Schematic presentation of torque-speed curve

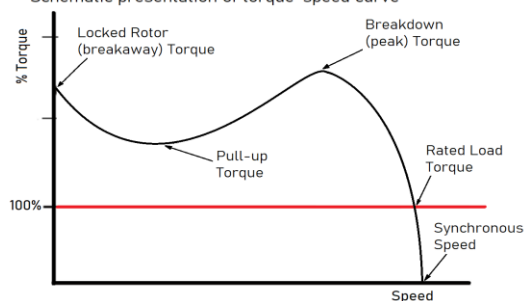

P000049463
P000054558



Driving efficiency and sustainability

